


9 14

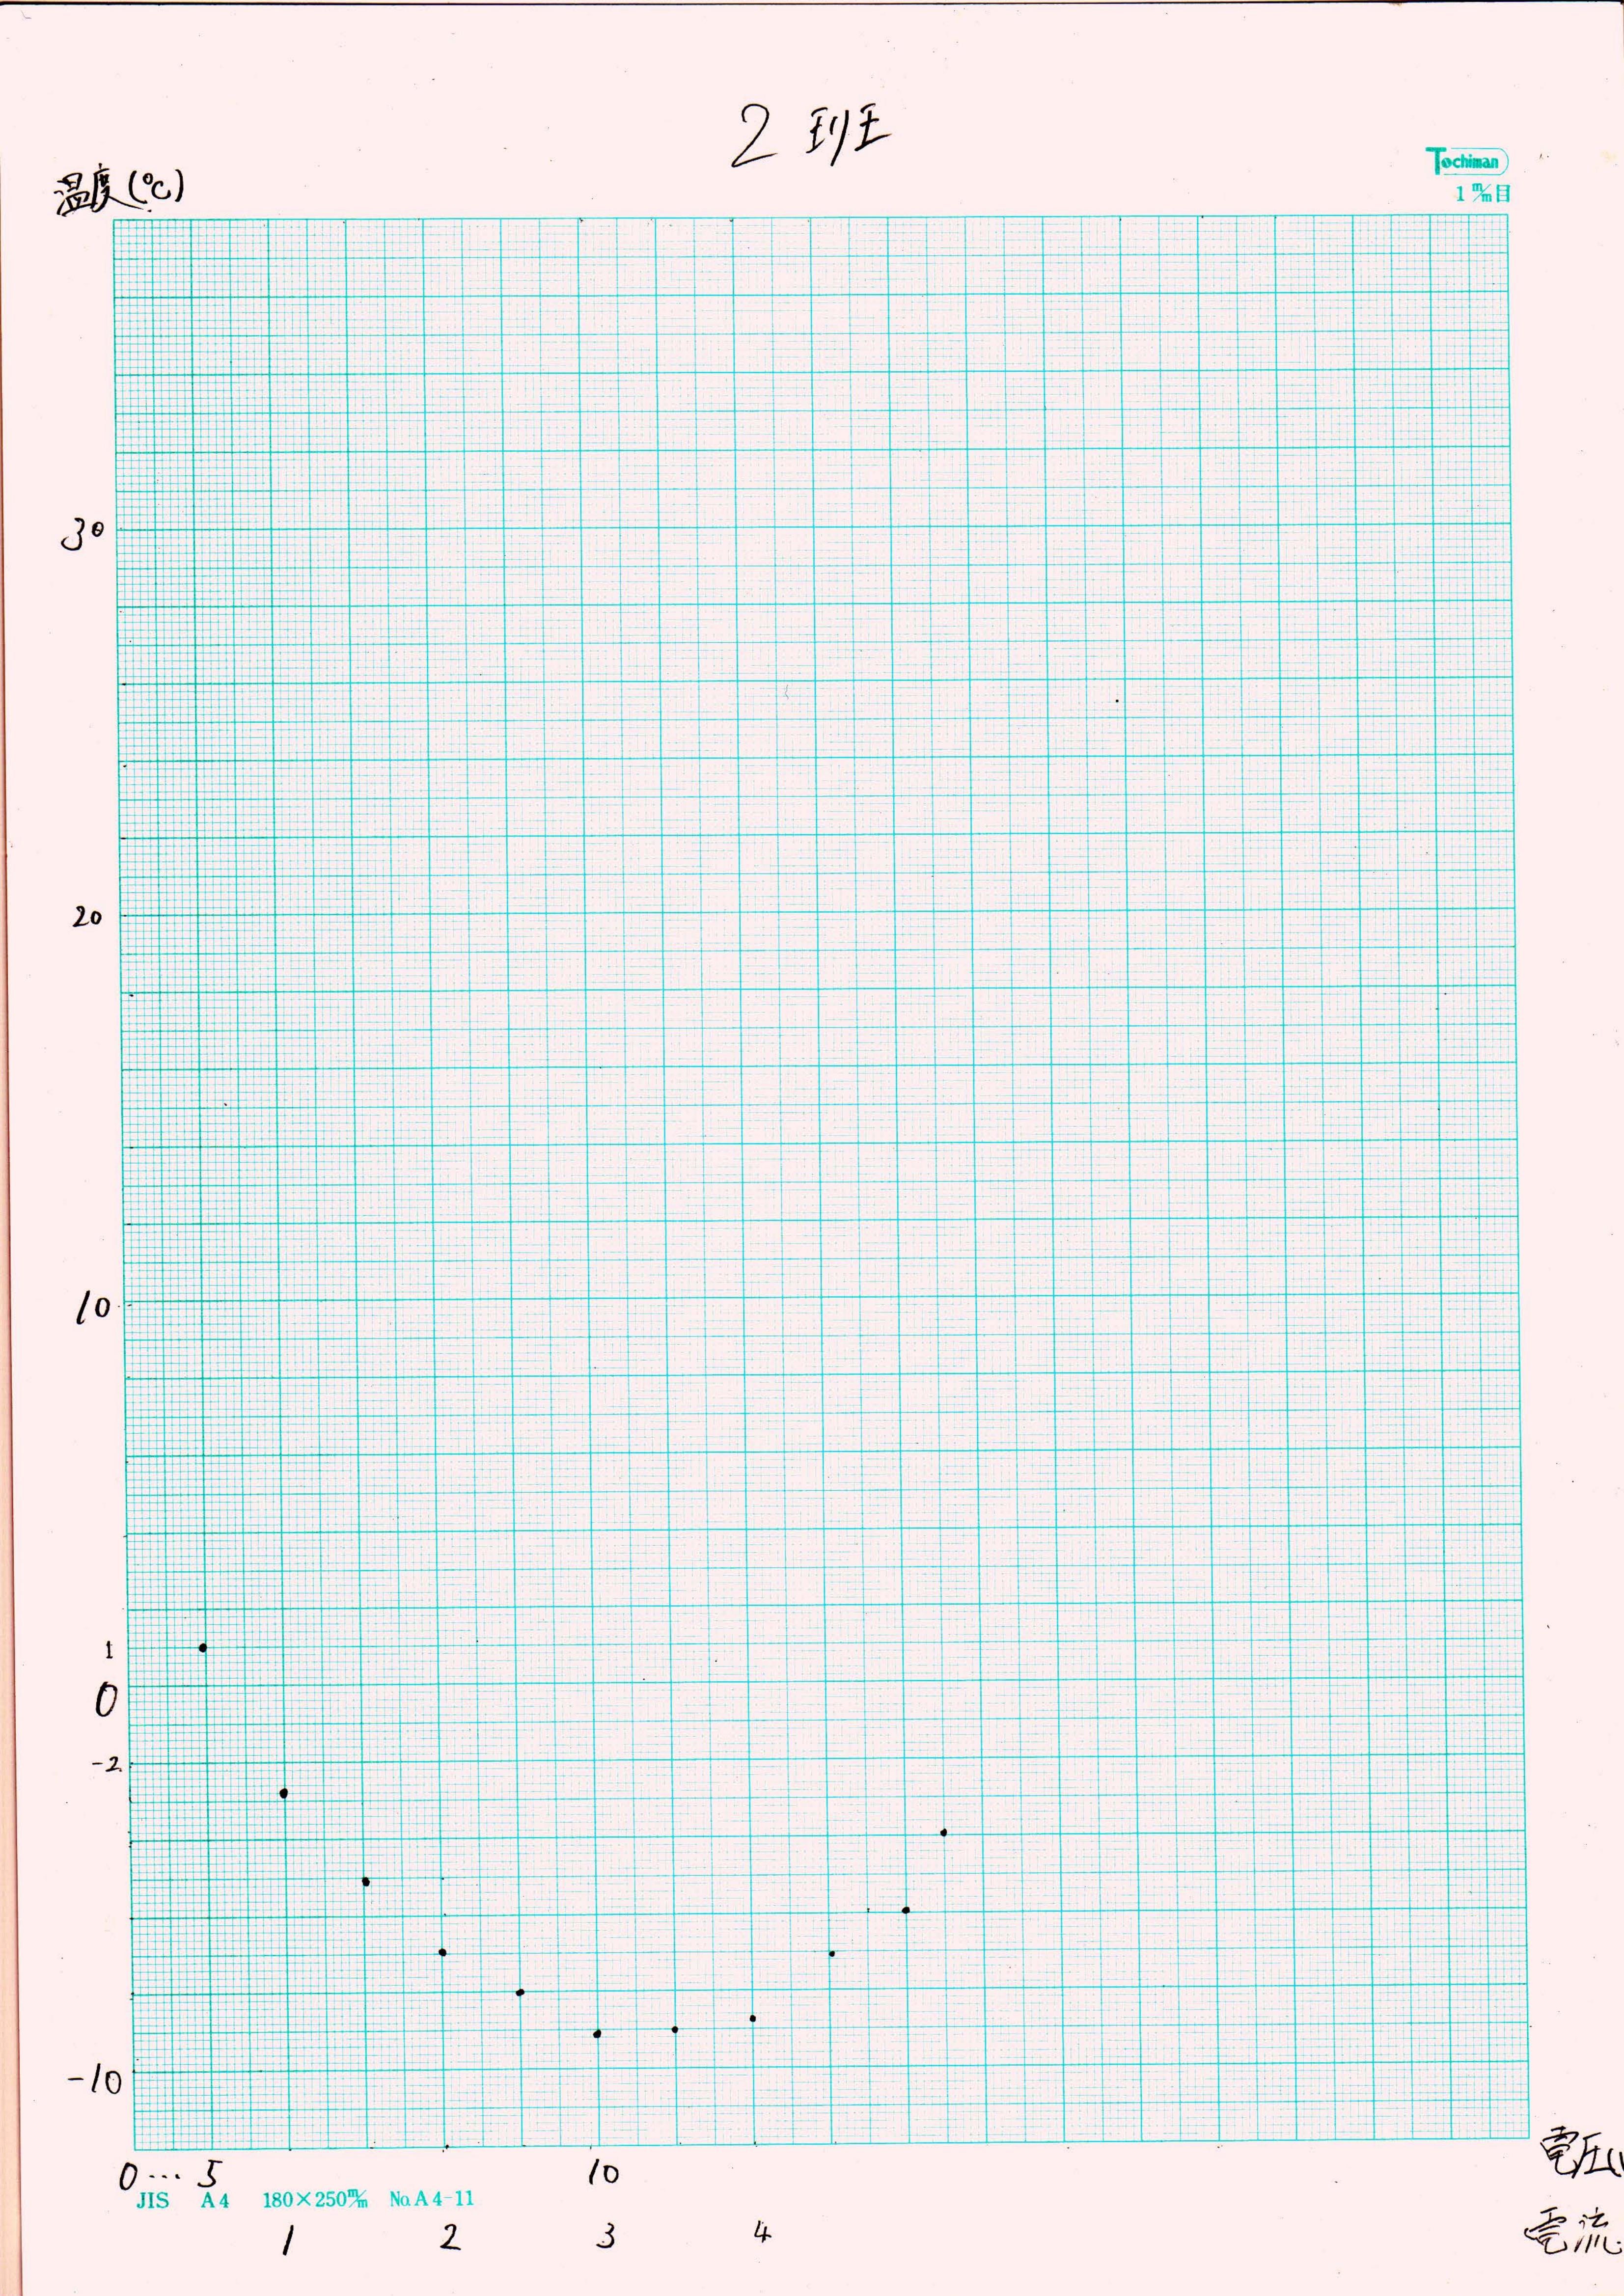

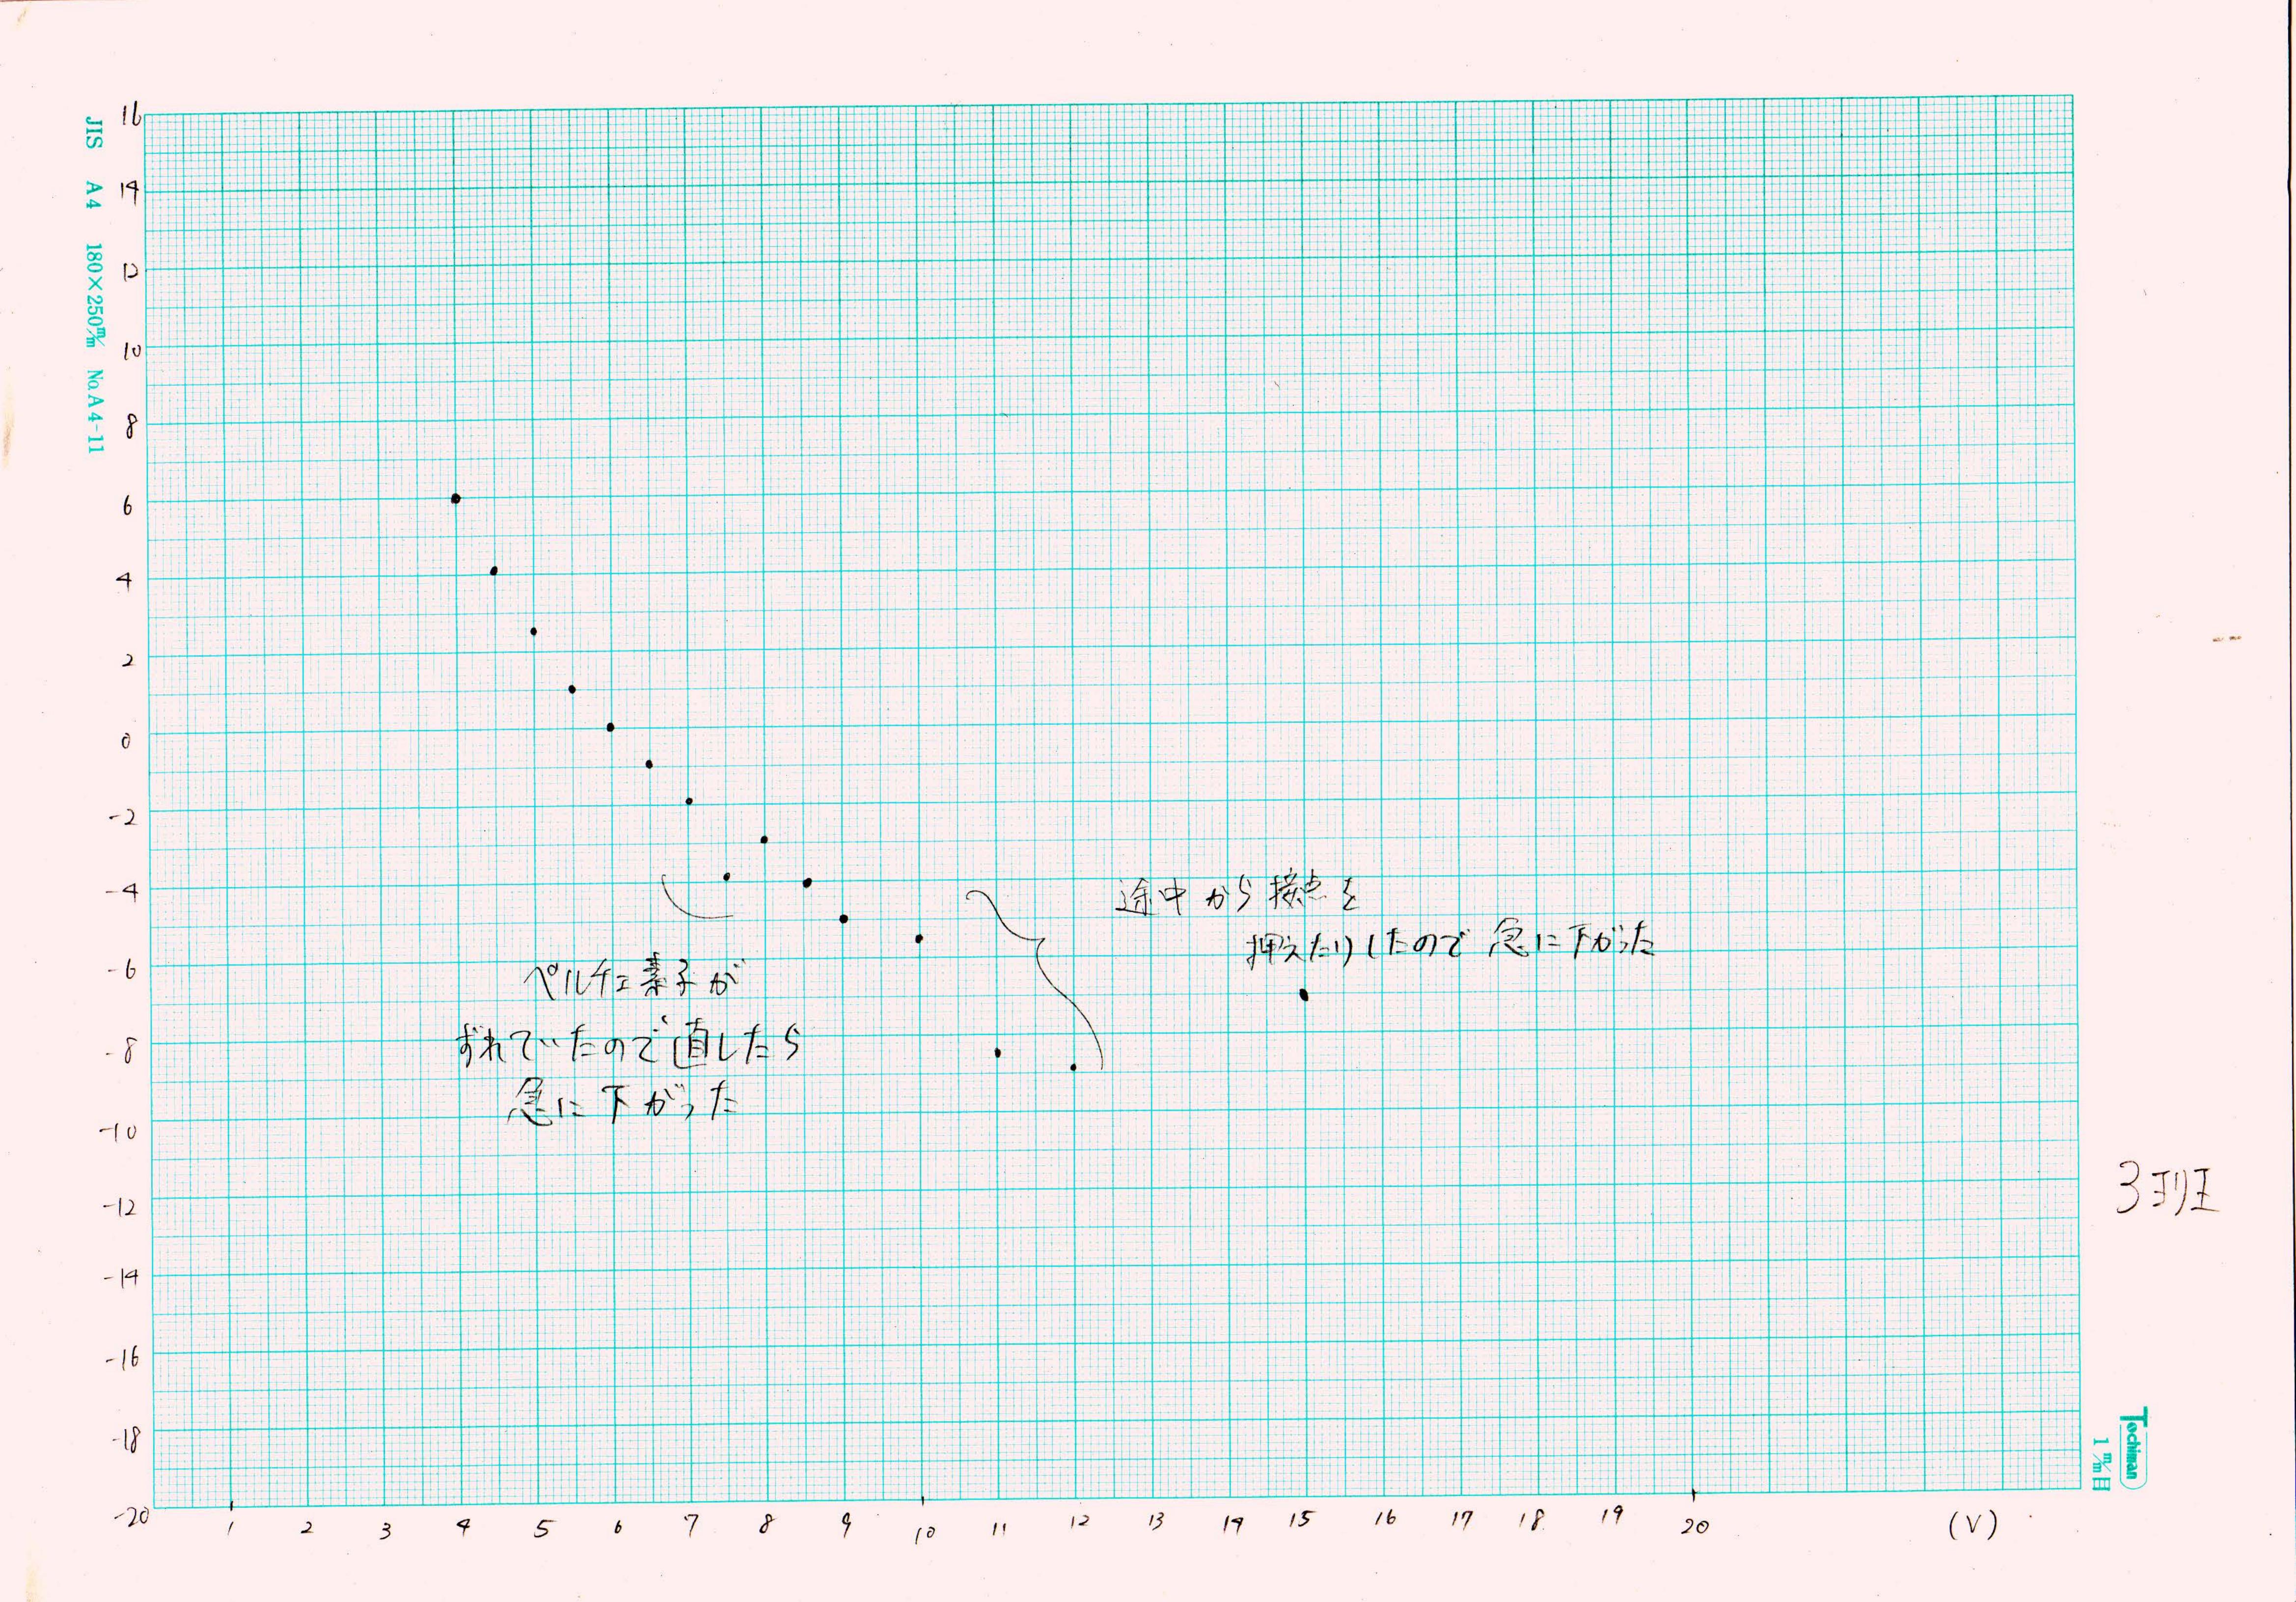

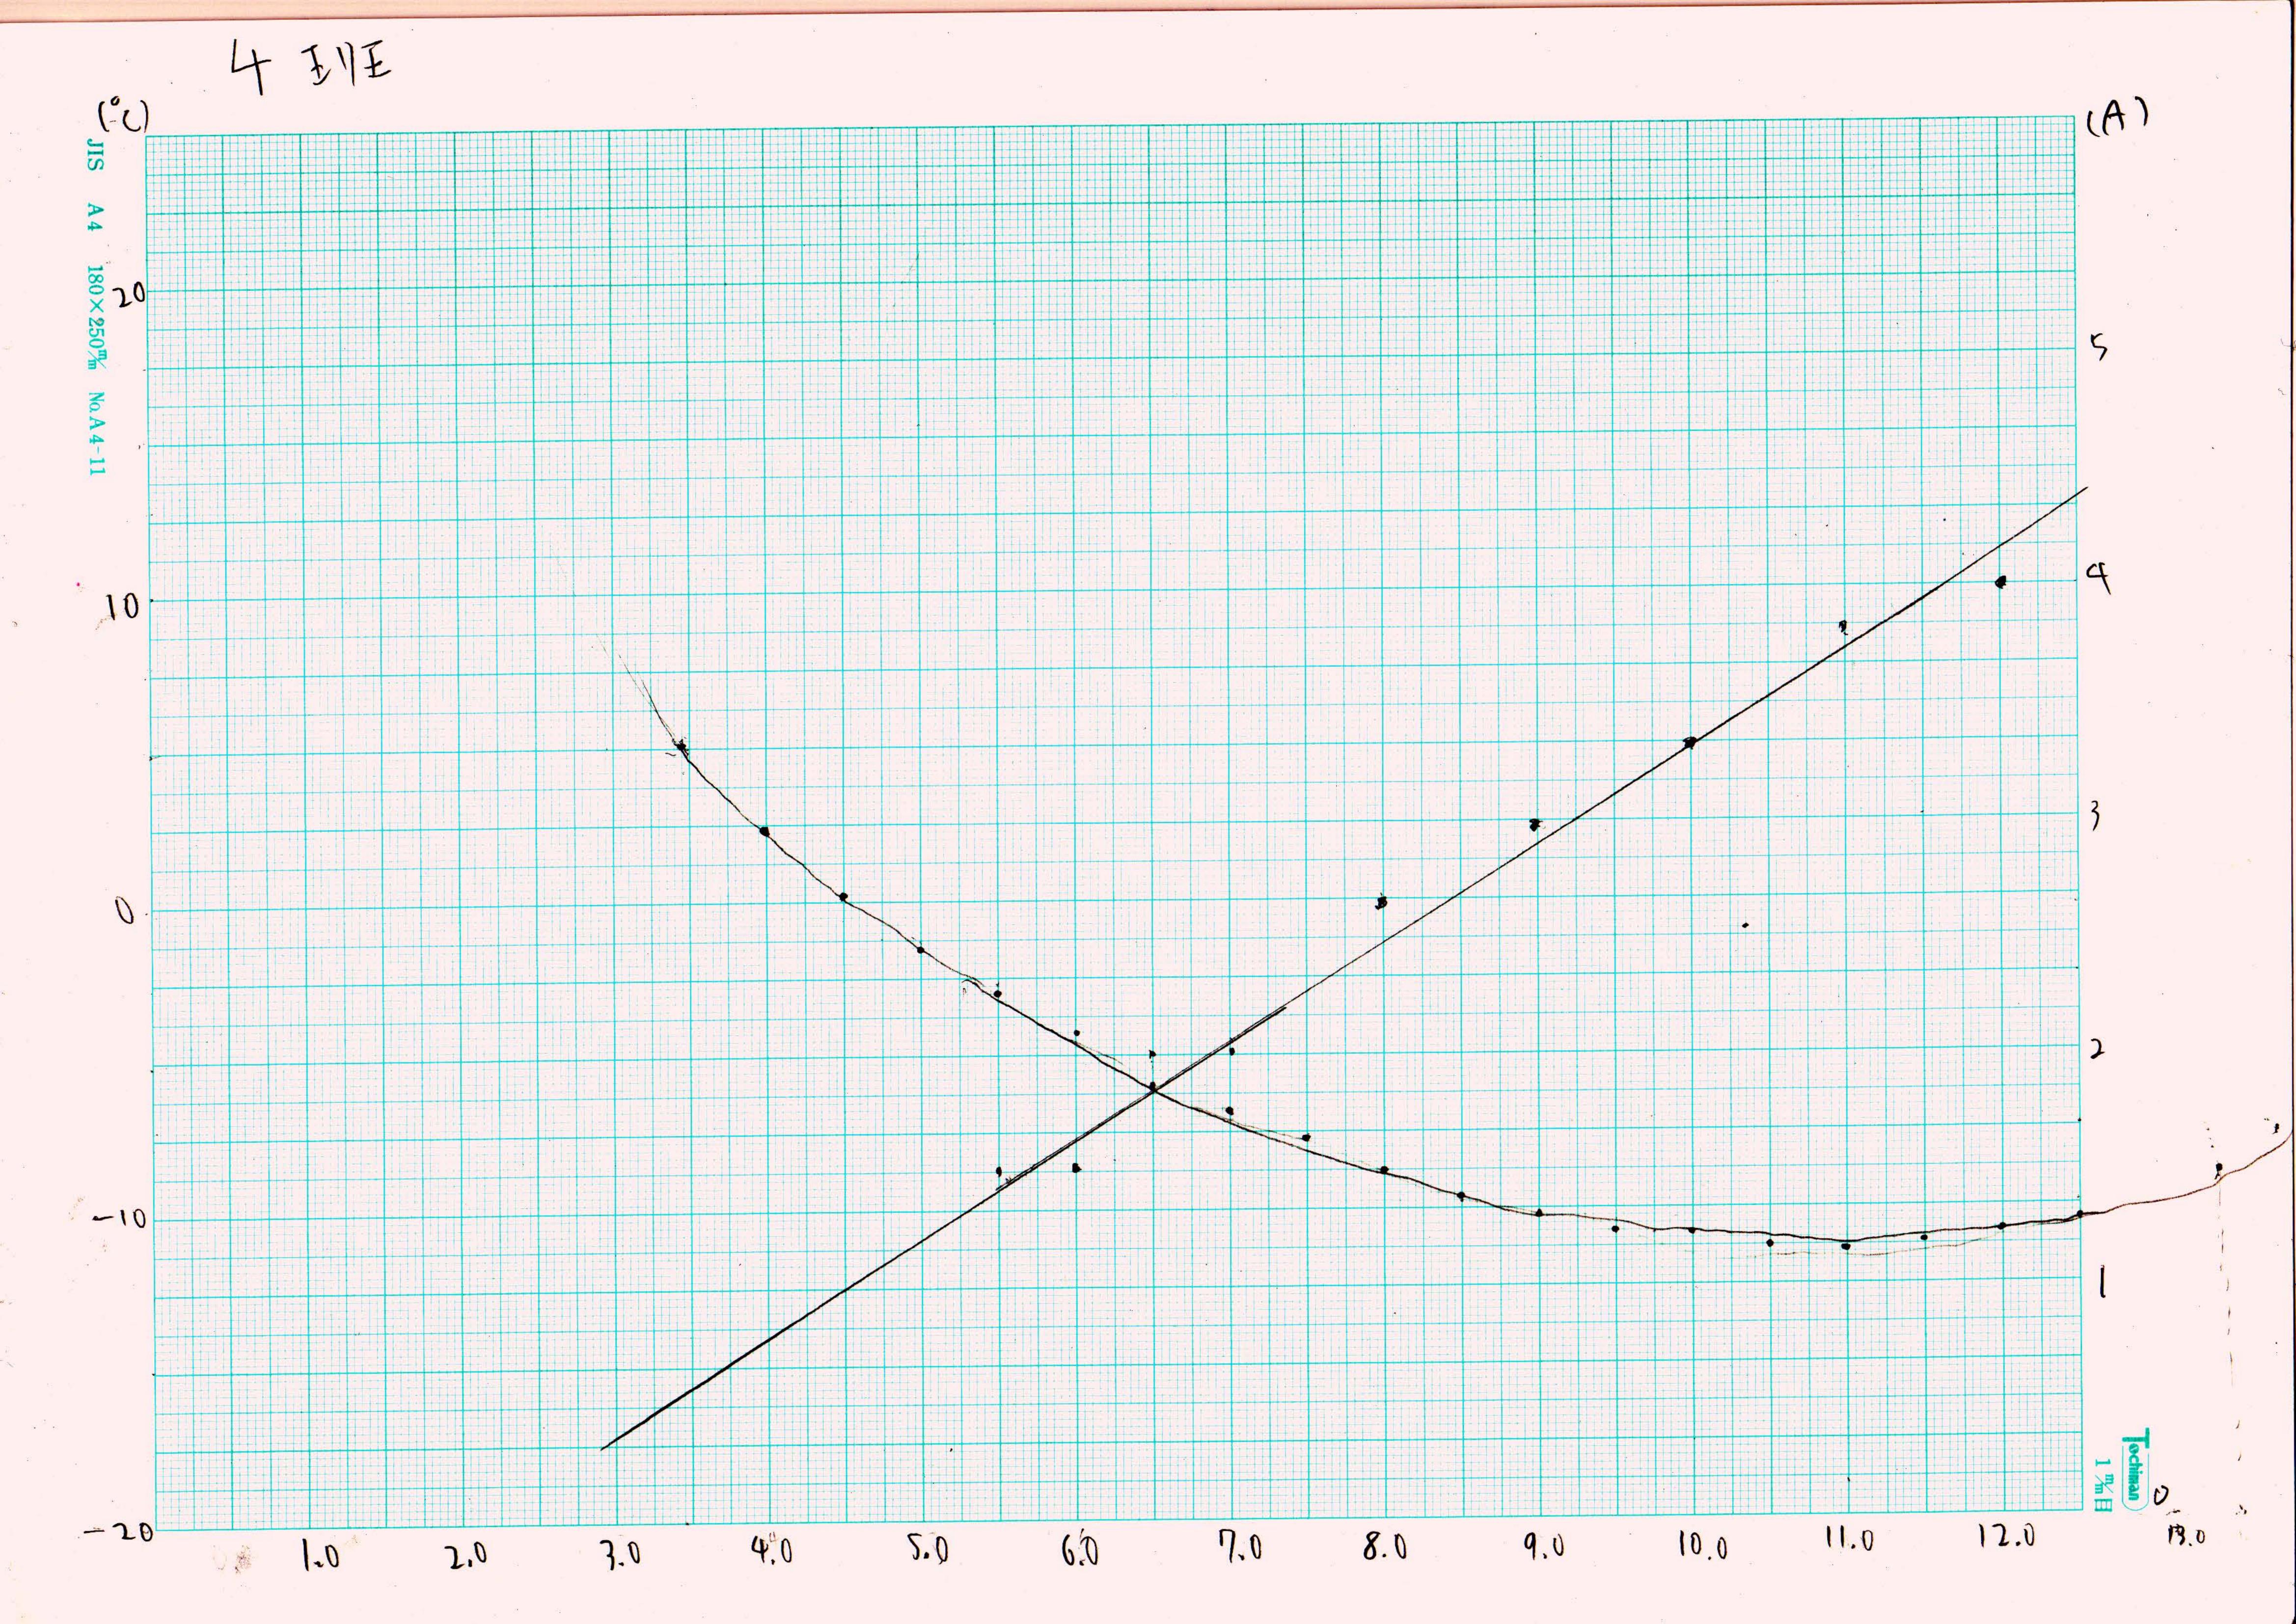

No. _____

/		
	7	1
		X

V A C 2.48 (.8 Q.5 3.48 (.7 Y.2 4.73 2.0 2.0 5.42 2.1 -0.5 6.48 2.5 -3.7 7.46 2.7 -5.2 8.50 3.2 -6.5 9.54 3.7 -6.8 10.60 4.0 -7.3 (1.63 4.4 -5.0 12.58 4.7 -3.4 13.38 5.1 -1.5 14.55 5.8 -0.6 (4.95 3.7 2.0					April 19 Commission of the Com				
3.98	V	A	°C						
4.73 2.0 2.0 5.42 2.1 -0.5 6.48 2.5 -3.7 7.45 2.9 -5.2 8.50 3.2 -6.5 9.54 3.7 -6.8 10.60 4.0 -7.3 11.63 4.4 -5.0 12.58 4.9 -3.4 13.38 5.2 -1.5 14.55 5.8 -0.6 14.95 5.9 2.0	2.88	1.8	9.5						
5,42 2.1 -0.5 6,48 2.5 -3.7 7,45 2.9 -5.2 8,50 3,2 -6.5 9,54 3,7 -6.8 10.60 4,0 -7.3 11,63 4.4 -5.0 12,58 4,9 -3.4 13,38 5,2 -1.5 14,55 5,8 -0.6 14,95 5,9 2.0	3.98	1.9	4.2						
6.48 2.5 -3.7 7.45 2.9 -5.2 8.50 3.2 -6.5 9.54 3.7 -6.8 10.60 4.0 -7.3 11.63 4.4 -5.0 (2.58 4.9 -3.4 13.38 5.2 -1.5 14.55 5.8 -0.6 [4.95 5.9 2.0	4.73	2.0	2,0						
6.48 2.5 -3.7 7.45 2.9 -5.2 8.50 3.2 -6.5 9.54 3.7 -6.8 10.60 4.0 -7.3 11.63 4.4 -5.0 12.58 4.9 -3.4 13.38 5.2 -1.5 14.55 5.8 -0.6 14.95 5.9 2.0	5,42		-0.5						
7.45 2.9 -5.2 8.50 3.2 -6.5 9.54 3.7 -6.8 10.60 4.0 -7.3 11.63 4.4 -5.0 12.58 4.9 -3.4 13.38 5.2 -1.5 14.55 5.8 -0.6 14.95 5.9 2.0		2.5	-3.7						
9.54 3.7 -6.8 10.60 4.0 -7.3 11.63 4.4 -5.0 12.58 4.9 -3.4 13.38 5.2 -1.5 14.55 5.8 -0.6 14.95 5.9 2.0		2.9			· ·				
10.60	8.50	3.2	-6.5						
10.60	9.54	3.7	-6.8						
11.63 4.4 -5.0 12.58 4.9 -3.4 13.38 5.2 -1.5 14.55 5.8 -0.6 14.95 5.9 2.0	10.60	4.0	-7.3						
12.58		4.4	-5.0						
13.38 5.2 -1.5 14.55 5.8 -0.6 14.95 5.9 2.0	12,58	4.9	- 3,4						
14.95 5.8 -0.6			-1.5						
	14.55	5,8	-0.6						
	14.95	5.9	2.0						

_											
	電丘	電流	温度	1	電圧	電流					
3	4.97V	2 A	5,3℃		4.93V	2 A	1.0°C				
6	7.90V	3 A	-0.3°C		6.00V	2.1 A	-2,80				
(8)	9.95V	4A	-0,60	(7:04V	2,9A	-5.5°C				
1	3.851/	1.4A	10,58	a	8.00V	3.12 A	-6.9°C				
02	4.50 V	1,88 A	7.9°C		9,00V	39A	-8.0°C				
4	5,52V	2.03A			10,00 V	3.9 A 4.0 A	-9,2°C				
8	6.49V	2.6A	2,3°C		11,00 V	4.15 A	-9.1°C				
77	8.49V	3,5A	0°C	11	12,00V	5A	-8.800				
S.	10.52V	4.01A	-0,4°C		13.05V	5.3A	-7.0°C				
29	12,01 V				14,01V	595A	-6.0℃				
					14.94V	6,02A	-4.0°C				
				l.							
				i.							
1								 L	L	 	

No. ____

)				
(V)	3.36	3.81	5,35	6.65	14.82	3.48	3.63	3.8	4.00	4.47	4.97	5.49	6.01
(c°)	7	5.6	0	-1.8		8.0	7.2	6.5	6-0	4.1	2.6	1.0	-0.0
(A)						1.5	1.5	1.8	1.9	2.0	2.0	2./	2,3
(V)		7.0	7.49.	7.97	8.51	9.02	10.02	10.99	12.02				
(C°)	-1.4	-1.8	-3.9	-2.4	-4.0	-5.0	-5-3	-8.7	-8.8				
(A)	2.8	3.0	3.3	3,5	3.8	3.9	4.2	5.0					
							£						

コクヨ シヨー26 (27×14) 3.36

4 班

No.

						The second of th				CONTRACTOR OF A CASE OF	enegative and large the large to	PAR DESCRIPTION	of the boundary of the Loty of
t	5.2	2.25	0.2	-1.6	-3.	-4.4	-5.8	-6.7	-7.7	-8.7	-9.6	-/0,3	-10,8
V	3,405	4.03	4.5	5,03	5.49	6.03	6,51	7.02	9.49	8,06	8.54	9.04	9.53
A					1.5	1.5	2,0	2,0	2,2	2,6	5,8	3,0	3.\
	-10.9	-11, 3	-11.5	-11.1	-10 9	- 10,6	-9.3-	-8,8					
	10.07	16,54	11.02	11.51	12.08	12,53	13.43	14.03					
	3,3	16,54	3.8	3,9	40	41	5.0	5.2					
													•
-													
									or.				